

3S N9071 Mini-Dome Camera

VISIONxIP

2 Megapixel / H.264 / Day&Night

- 2 Megapixel 1/3" CMOS Sensor in High Resolution
- H.264/MJPEG Dual Codec & Streaming simultaneously
- Up to UXGA (1600x1200@15fps) / WXGA (1280x720@30fps)
- 3D Noise Reduction
- Microphone Embedded
- 3GPP Support
- PoE Power Over Ethernet IEEE802.3af (Option)




Specifications

Camera		I/O and Connectors	
Sensor	2 Mega Pixel 1/3" CMOS sensor	LAN	1x RJ-45 Ethernet connector
Scan Method	Progressive	Audio	1x Internal MIC
Lens	3.6mm , F1.8	Software	
Range of Angle view	67° (Horizontal)	Browser	Internet Explorer 6.0 or above
Number of Effective Pixel (H*V)	1600 x1200	Application Software	VMS Application Software
Minimum Illumination	0.1 Lux (AT 30 IRE F1.4 Lens)	OS supported	Microsoft Windows 2000, XP , Vista, Windows 7
Dynamic Range	71db	Features	
SNR(max)	42.3db	User Setting	
Auto White Balance	Yes	Date/ Time Setting	
Auto Gain Control	Yes	Video image control	
Backlight Compensation	on/off	Upload configuration	
Electronic Shutter	Auto, Slow Shutter (2X~16x / 5 step selection)	Dynamic DNS	
Pan Coverage	-15°~+15°	Motion Detection	
Tilt Coverage	0°~90°	Events	
Video		Triggered Actions	
Video Compression	H2.64 BP and MJPEG Dual codec, dual streaming , multiple profiles	Blind Detection	
Video framerate	Dual Streaming (1280x720/30FPS + 640x352/30FPS)	Privacy Mask	
Resolution	H.264: 1600x1200, 640x480/320x240/160x128 1280x720, 640x352/320x176/192x112 MJPEG: 1600x1200, 640x480/320x240 1280x720, 640x352/320x176	Open API	
Bitrate control	CBR and VBR, 128kbps ~ 4Mbps	CGI commands to control camera Media SDK to handle streaming	
Digital Zoom (Device side)	Yes, x 1/2, x 2, x 4	Factory Default	
Image Rotation (PC side)	Mirror	Button	
DNR	Yes	Power	
Audio		Power	
Compression	AMR, G.711 @ 64kbps, G.726 @ 32kbps/ Configure bit rate	Power	
Network		Power Consumption	
Protocols	IP, TCP, UDP, ICMP, IGMP, ARP, DHCP, DNS, DDNS, NTP, RTP, RTSP, HTTP, Multicast, UPnP SMTp, FTP, PPPOE, QoS	Physical Properties	
3GPP Mobile Surveillance	Yes	Dimensions	
Processors and Memory		Weight	
CPU	ARM9 SOC	Operating Environment	
Flash and Memory	16MB ROM, 256MB DDRII RAM	Operating temperature	
		Storage temperature	
		storage humidity	
		Certification	
		CE, FCC Class A, RoHS	
		Warranty	
		12 months	



Dimension Diagram

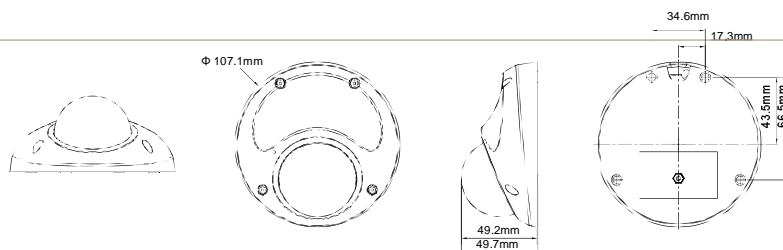

Distributed by:

VISIONxIP
 info@visionxip.com
 www.visionxip.com
 Tel: 5411 3221 0309